

QF(26) - Series Miniature Circuit Breakers - High Rating (70 - 125 A)



Dual Mount
1 pole

Dual Mount
2 pole

Dual Mount
3 pole

Dual Mount
3+N

Features

- AC circuit breaker
- Hydraulic-magnetic technology
- 100% rating capability, independent of ambient temperature
- One, two, three pole, 1+N and 3+N (VDE)
- VC 8036 compliant (SANS 556-1)
- VDE and EAC approved, CE certified
- Ratings 70 to 125 A (subject to certification)
- Available in various currents and time delays
- Precision tripping characteristics
- Reset immediately after overload
- Dual mount product in black shells
- Suitable to use for electrical isolation

Applications

- AC branch circuit protection (IEC / EN 60947-2)
- Switch disconnector (IEC / EN 60947-3, UL 508)
- Telecom / datacom equipment
- Lighting control
- UPS equipment
- Alternative energy equipment
- Mobile power generation equipment
- Railway signalling equipment
- Residential equipment
- Industrial equipment

Optional Accessories

- Handle lock
- Surface mounting clips
- Busbar
- Escutcheon blank
- Safety blank

Approvals

VC 8036



(IEC / EN 60947-2 / 3)



QF(26) - Series Miniature Circuit Breakers - High Rating (70 - 125 A)

Technical Data

Product Type	Circuit Breaker				
Approvals	VC 8036 (SANS 556-1)				
Number of Poles	1	2 (1+N)	2	3	4 (3+N)
Operating Voltages	240 V AC		415 V AC		
Minimum Current Rating	70 A				
Maximum Current Rating	125 A				
Specific Ratings (Verify Certification)	70, 80, 90, 100, 125 A				
Interrupting Capacity	5 kA				

Product Type	Circuit Breaker				
Approvals	IEC / EN 60947-2, VDE, CE, EAC				
Number of Poles	1	2 (1+N)	2	3	4 (3+N)
Operating Voltages	240 V AC		415 V AC		
Minimum Current Rating	70 A				
Maximum Current Rating	125 A				
Specific Ratings (Verify Certification)	70, 80, 90, 100, 125 A				
Interrupting Capacity	6 kA				

Product Type	Switch Disconnecter			
Approvals	VC 8036 (SANS 556-1), IEC / EN 60947-3, VDE, UL 508			
Number of Poles	1	2	3	4
Operating Voltages	240 V AC	415 V AC		
Current Rating	125 A			
Short-time Withstand	6 kA			

Product Type	QF(26)HR
Operating Temperature Range	-40 °C to +85 °C
Mounting Options	Dual mounting (DIN & Mini), surface mount
Time Delay Curves	1, 2
Endurance	10000 operations - 1500 electrical at rated current and voltage (IEC 60947-2)
Dielectric Strength	1480V (single pole) / 1830V (multi pole), 50 Hz for one minute after testing
Weight	200 g per pole (unpacked)
Humidity	35 to 85% relative
Altitude	Certification tests done at altitude ≈ 2000 metres. Will operate at higher altitudes.
Shock	50 G to MIL-STD-202G, test method 213B, test condition 1
Vibration	10 G to MIL-STD-202G test method 204D, test condition A
Flammability	I3 - Ignition does not persist at 850 °C after glow wire is withdrawn with an oxygen index of ≥ 28
Toxicity	F1 - Smoke index of ≤ 20 which determines the fume class
Pollution Degree	PD2 - Normally only non-conductive pollution occurs. Temporary conductivity caused by condensation is to be expected.

Breaker QF	Wire Size mm ² (IEC)	Torque (IEC)	Comments
1 Pole to 4 Pole	1 - 50 mm ²	4 Nm	Pozidriv #2 Combi head

QF(26) - Series Miniature Circuit Breakers - High Rating (70 - 125 A)

Ordering Information

Example Code: QF----3(26)-DM-2-125A-----


Group	1	2	3	4	5	6	7	8	9	10	11
Requirement	QF Frame	Switch / Neutral	Not applicable	Triple pole	26 mm module width	Dual Mount	Medium delay curve 2	Current Rating 125 A	Future use	Shunt Trip	Future use
Long Code	QF	-	-	3	(26)	DM	2	125A	-	-	-

Group	Code	Description	Comments
Group 1: Frame Type	QF	26 mm wide miniature circuit breaker / switch disconnecter	
Group 2: Switch/Neutral	-	Not applicable	Overload poles do not have any further coding
	S	Switch	Green handle
	N	Neutral	Green handle
Group 3: Auxiliary	-	Not applicable	
Group 4: No of Poles	1	Single pole	
	2	Double pole	2 pole or 1+N
	3	Triple pole	
	4	Four pole	4 pole or 3+N
Group 5: Module Width	(26)	26 mm module width	26 mm per pole
Group 6: Mounting	DM	Dual mount	Dual mount supplied in black body only - 57 mm escutcheon
Group 7: Time Delays			Instantaneous Trip Point (x In)
	1	Long time delay, high instantaneous trip	10 – 20
	2	Medium time delay	5 – 10
Group 8: Current Ratings		Code / Description	Comments
		70, 80, 90, 100, 125 A	
Group 9:	Code	For future use (-)	
Group 10: Shunt Trip		Description	Comments
	-	Not applicable	Use this code if no shunt trip is used
Group 11	Code	For future use (-)	

For options not listed, please contact CBI

QF(26) - Series Miniature Circuit Breakers - High Rating (70 - 125 A)


Time Delay Curves

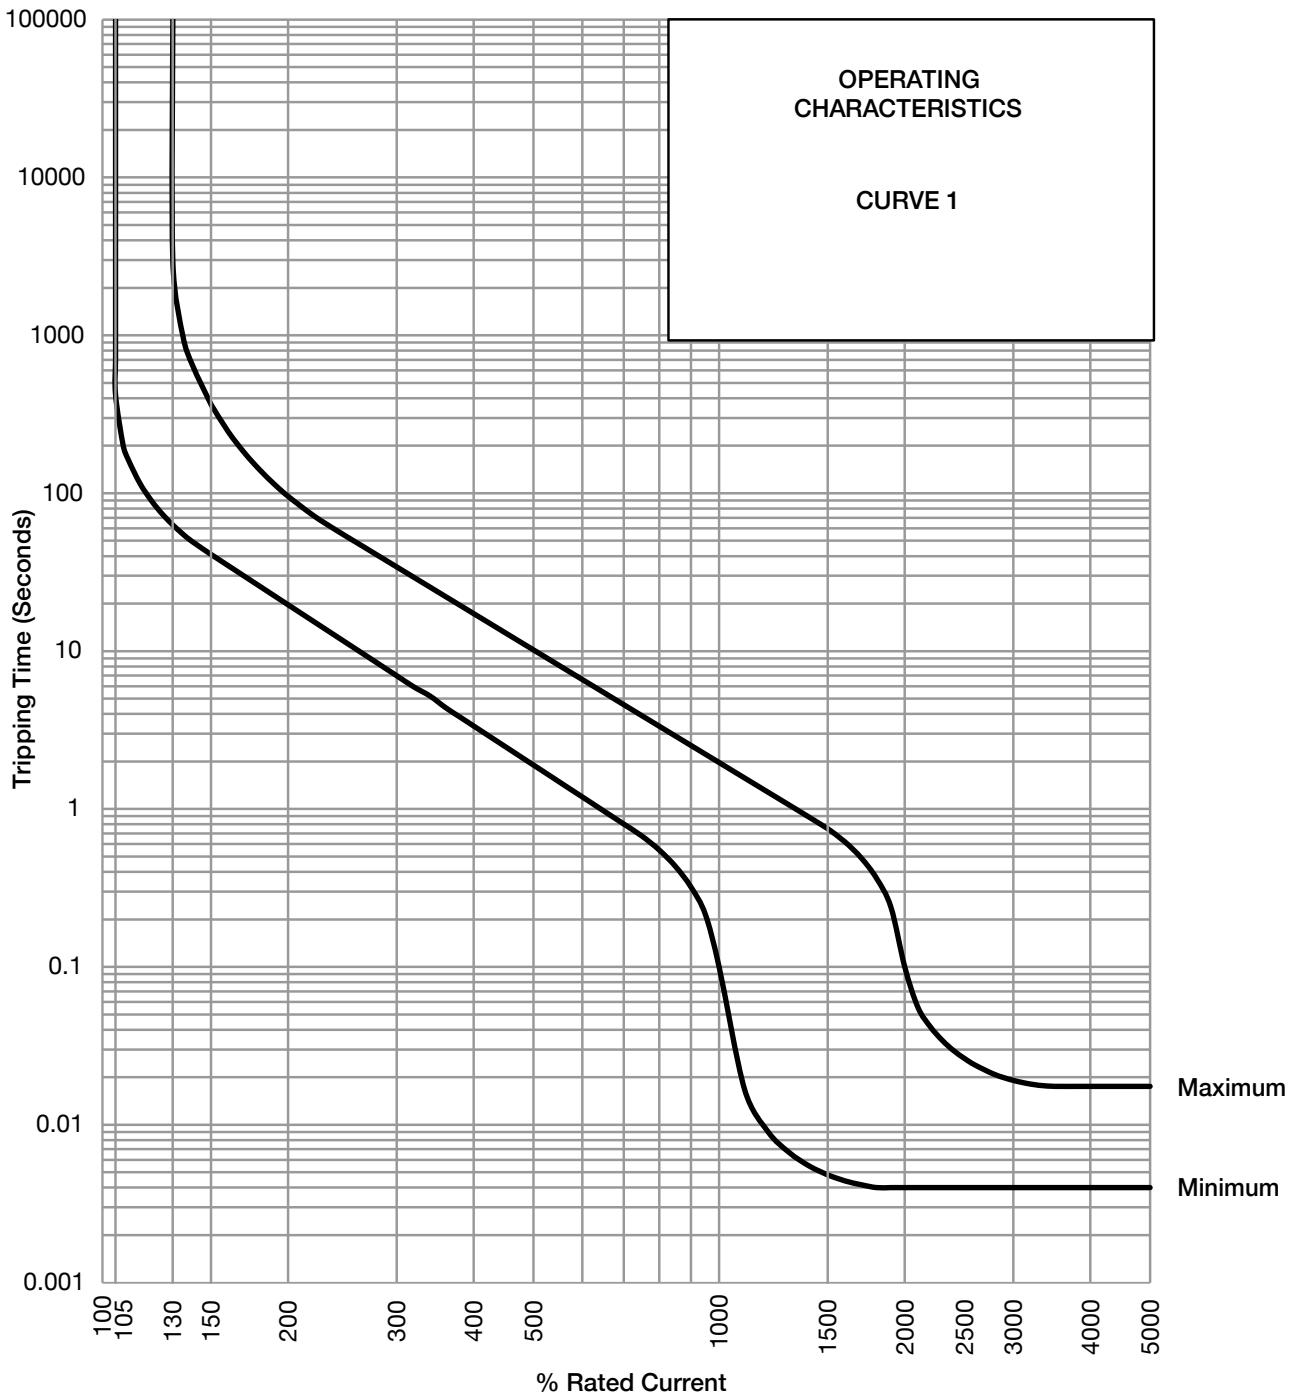

* The published time delay curves are generated at 30°C ambient temperature with the Circuit Breaker mounted in the up-right position. The “must hold”, “must trip” and “instantaneous trip” current values are not affected by temperature, although delay time for the other operating current values may have to be adjusted using the temperature compensation curve which is available on request.


QF(26) - Series Miniature Circuit Breakers - High Rating (70 - 125 A)

Time Delay Curves

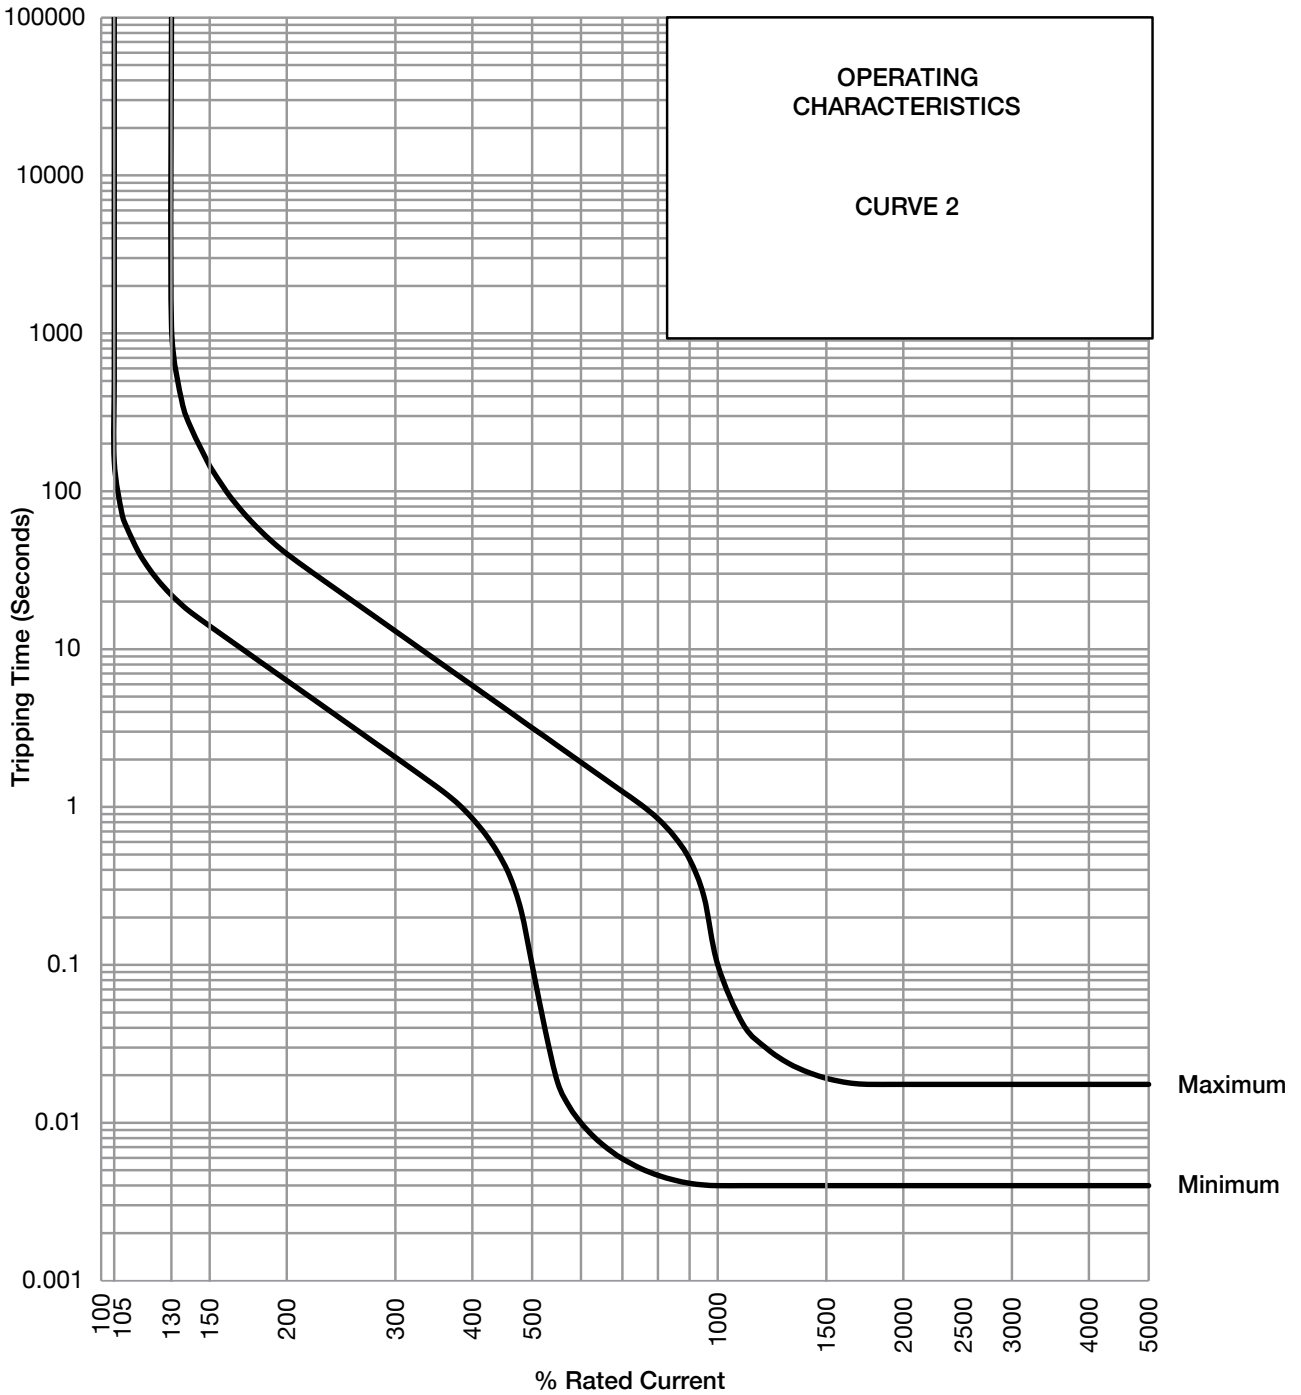

QF(26) - Series Miniature Circuit Breakers - High Rating (70 - 125 A)

Outline Dimensions: Dual Mount

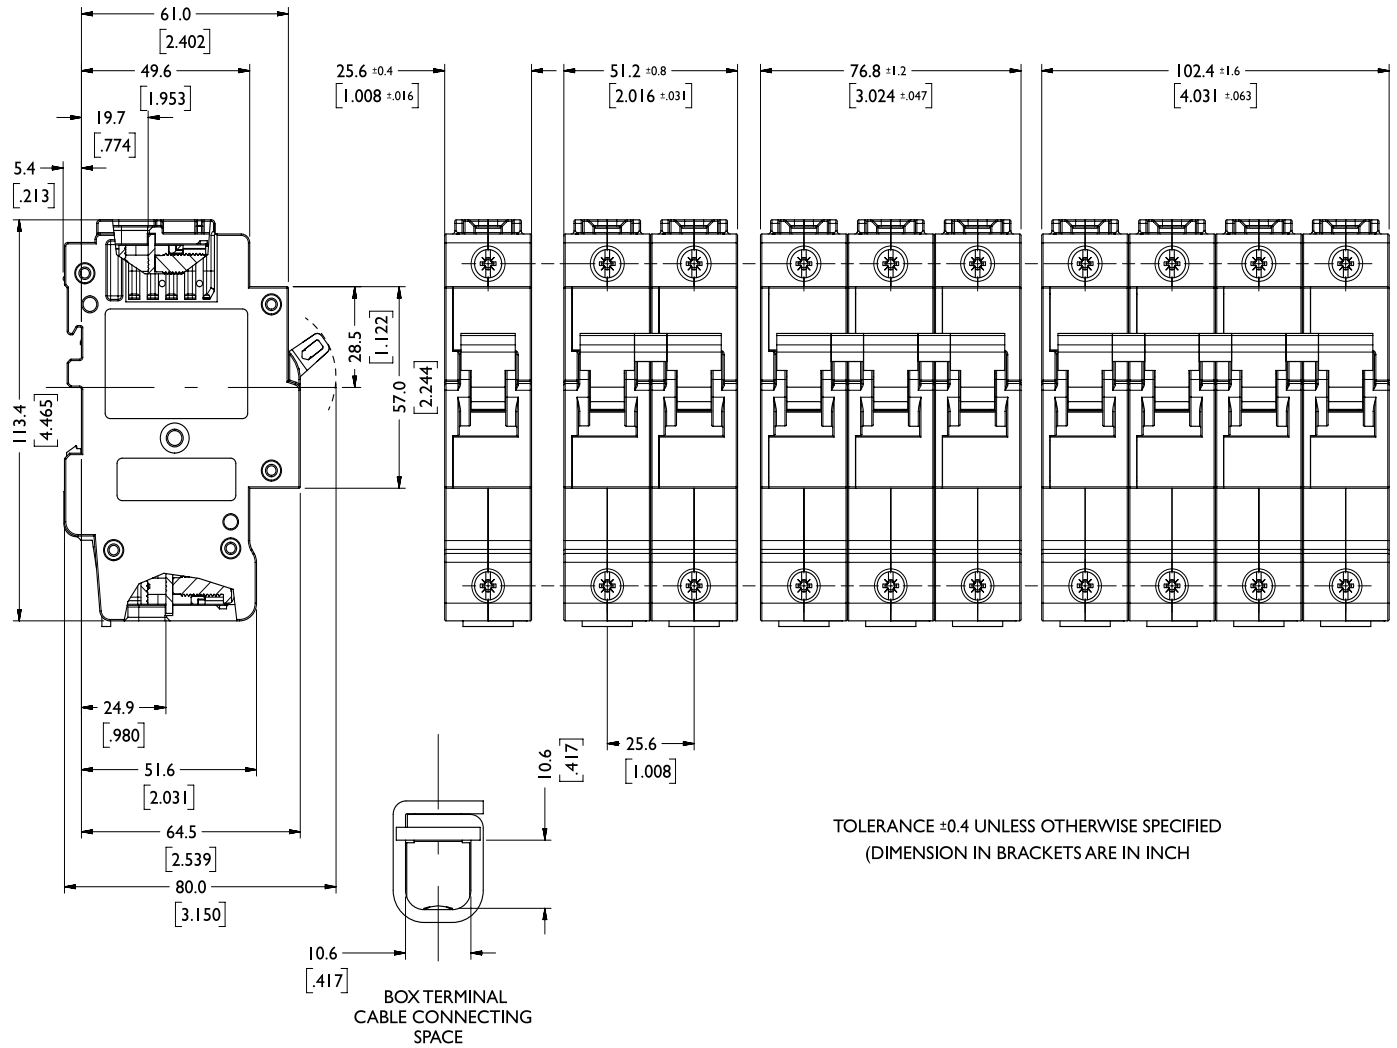

Please review our Customer Terms and Conditions on www.cbi-lowvoltage.co.za

© 2016.09 CBI (Pty) Ltd. All Rights Reserved.

All rights reserved. Unless otherwise indicated, all materials on these pages are copyrighted by CBI (Pty) Ltd. No part of these pages, either text or image may be used for any purpose other than personal use. Therefore, reproduction, modification, storage in a retrieval system or retransmission, in any form or by any means, electronic, mechanical or otherwise, for reasons other than personal use, is strictly prohibited without prior written permission. CBI (Pty) Ltd reserves the right to alter any details of this document without notice and while every effort is made to ensure the accuracy of the content, no warranty is given as to accuracy of this document and no responsibility will be accepted for error or misinterpretation and any resulting loss.

SCANDINAVIA

Emcomp International AB

Box 7, Hemvägen 12
 732 71, Fellingsbro Sweden
 Tel: +46 (0)581 62 15 50
 Fax: +46 (0)581 62 15 60
 Email: info@emcomp.se
 Website: www.emcomp.se

EUROPE

Emcomp International AB

Gewerbepark 23
 85250 Altomünster Germany
 Tel: +49 8254 994 334 10
 Fax: +49 8254 994 334 19
 Email: info@emcomp.se
 Website: www.emcomp.de