

Technical Data Sheet

EDG Sheet Steel Hinged Door Switchgear



CDPD101
Issue 10

Sheet Steel Hinged Door Switchgear

A range of 'hinged door' Light Grey (RAL 7035) powder coated sheet steel isolation equipment. Supplied in IP65 generously sized boxes which helps to avoid the need for extension boxes. All enclosures have the switches mounted on a removable galvanised chassis plate. All units are provided with removable top & bottom gland plates. The range has a padlockable handle which allows for the insertion of up to three padlocks in the "Off" position. The hinged door cannot be opened in the ON position or when the hand is padlocked in the OFF position. For padlocking in both 'Off' and 'On' positions, add '/10' to the catalogue no. e.g. EDG00323N/10. The door interlock handle can be defeated to enable emergency opening or for testing purposes (100A and above).

Both red (RAL 3020) painted Sheet Steel and Stainless Steel (Grade 304 & 316) enclosures are available on request for the more severe environments. Contact our sales team on 01543 375 541 for further information. Compliant to IEC / BS EN 60947-3.


'N' = switched neutral | 'NL' = Unswitched neutral (100% rated 32A-200A, 50% rated 250A-1250A) | 'EB' = Early break auxiliary contacts

Switch-Disconnectors (O-I)							
Image	Rating	Format	Cat. No.	Encl. Size	Encl. Material	IP Rating	Encl. Colour
	32A	3P+N	EDG00323N	1	Sheet Steel	IP65	Light Grey RAL 7035
		3P+NL	EDG00323NL				
	63A	3P+N	EDG00633N	1	Sheet Steel	IP65	
		3P+NL	EDG00633NL				
		6P	EDG00636				
		6P+2EB Aux	EDG00636EB				
80A	3P+N	EDG00803N	1	Sheet Steel	IP65		
	3P+NL	EDG00803NL					
	6P	EDG00806					
	100A	3P+N	EDG01003N	1	Sheet Steel	IP65	
		3P+NL	EDG01003NL	5			
		6P	EDG01006	5			
	125A	3P+N	EDG01253N	3	Sheet Steel	IP65	
		3P+NL	EDG01253NL	5			
		6P	EDG01256	5			
160A	3P+N	EDG01603N	3	Sheet Steel	IP65		
	3P+NL	EDG01603NL	5				
	6P	EDG01606	5				
	200A	3P+N	EDG02003N	7	Sheet Steel	IP65	
		3P+NL	EDG02003NL				
	250A	3P+N	EDG02503N	9	Sheet Steel	IP65	
		3P+NL	EDG02503NL				
	400A	3P+N	EDG04003N	11	Sheet Steel	IP65	
		3P+NL	EDG04003NL				
	630A	3P+N	EDG06303N	13	Sheet Steel	IP65	
		3P+NL	EDG06303NL				
	800A	3P+N	EDG08003N	13	Sheet Steel	IP65	
		3P+NL	EDG08003NL				
	1000A	3P+N	EDG10003N	14	Sheet Steel	IP65	
		3P+NL	EDG10003NL				
1250A	3P+N	EDG12503N	15	Sheet Steel	IP65		
	3P+NL	EDG12503NL					
Changeover Switch-Disconnectors (I-O-II)							
	63A	4P	ECODG00634	4	Sheet Steel	IP65	Light Grey RAL 7035
	100A	4P	ECODG01004	4	Sheet Steel	IP65	
	125A	4P	ECODG01254	8	Sheet Steel	IP65	
	160A	4P	ECODG01604	8	Sheet Steel	IP65	
	200A	4P	ECODG02004	8	Sheet Steel	IP65	
	250A	4P	ECODG02504	10	Sheet Steel	IP65	
	400A	4P	ECODG04004	13	Sheet Steel	IP65	
	630A	4P	ECODG06304	13	Sheet Steel	IP65	

Technical Data Sheet

EDG Sheet Steel Hinged Door Switchgear

CDPD101
Issue 10


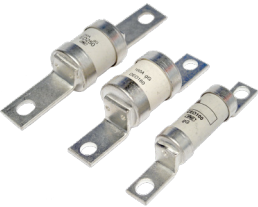

Fuse Combination Units (O-I)							
Image	Rating	Format	Cat. No.	Encl. Size	Encl. Material	IP Rating	Encl. Colour
	32A	3P+NL	EDFG00323NL	2	Sheet Steel	IP65	Light Grey RAL 7035
	63A	3P+NL	EDFG00633NL	2	Sheet Steel	IP65	
	100A	3P+NL	EDFG01003NL	6	Sheet Steel	IP65	
	125A	3P+NL	EDFG01253NL	6	Sheet Steel	IP65	
	160A	3P+NL	EDFG01603NL	6	Sheet Steel	IP65	
	200A	3P+NL	EDFG02003NL	8	Sheet Steel	IP65	
	250A	3P+NL	EDFG02503NL	8	Sheet Steel	IP65	
	315A	3P+NL	EDFG03153NL	12	Sheet Steel	IP65	
	400A	3P+NL	EDFG04003NL	12	Sheet Steel	IP65	
	630A	3P+NL	EDFG06303NL	13	Sheet Steel	IP65	
	800A	3P+NL	EDFG08003NL	13	Sheet Steel	IP65	

Hinged Door Accessories

Add-on auxiliary blocks are available for all hinged door products. All auxiliaries are supplied as 1 N/O+1 N/C pair. All N/O auxiliary contacts are early break with respect to the main poles when switching from 'On' to 'Off'.

All of the Fuse Combination Units are supplied fitted with a set of fully rated IEC/BS EN 60269 (BS88) fuse links. Replacements can be supplied as individual fuse links and can be fitted to a lower rating to suit a particular load; please refer to the rating table below to maintain the correct size/tag format.

Terminal protection is provided on all items for live incoming terminals; spare terminal covers are available for replacement or extending the protection to the outgoing terminals. (Not available for 800A- 1250A switch-disconnectors.)

Auxiliary Contacts		
Image	Description	Cat. No.
	Auxiliary Contact for 32A- 200A Switch-Disconnectors (Type A)	SAUXCO
	Auxiliary Contact for 63A- 160A Fuse Combination (Type B)	SAUXKITA
	Auxiliary Contact for 250A Switch-Disconnectors (Type C)	SAUXKITB
	Auxiliary Contact for 400A- 800A Switch-Disconnectors & 200A- 400A Fuse Combination (Type C)	SAUXKITC
	Auxiliary Contact for 1000A Switch-Disconnectors & 630A Fuse Combination Units (Type D)	SAUXKITD
Fuse Links		
	32A Fuse Link. BS Fuse format A2, A3. Fuse Fixing CRS (mm) 73 nom.	SFL32
	63A Fuse Link. BS Fuse format A2, A3. Fuse Fixing CRS (mm) 73 nom.	SFL63
	100A Fuse Link. BS Fuse format A4. Fuse Fixing CRS (mm) 94 nom.	SFL100
	125A Fuse Link. BS Fuse format A4. Fuse Fixing CRS (mm) 94 nom.	SFL125
	160A Fuse Link. BS Fuse format B1, B2. Fuse Fixing CRS (mm) 111 nom.	SFL160
	200A Fuse Link. BS Fuse format B1-B2. Fuse Fixing CRS (mm) 111 nom.	SFL200
	250A Fuse Link. BS Fuse format B1-B2. Fuse Fixing CRS (mm) 111 nom.	SFL250
	315A Fuse Link. BS Fuse format B1-B4. Fuse Fixing CRS (mm) 111 nom.	SFL315
	400A Fuse Link. BS Fuse format B1-B4. Fuse Fixing CRS (mm) 111 nom.	SFL400
630A Fuse Link. BS Fuse format C1-C3. Fuse Fixing CRS (mm) 133/184 nom.	SFL630	
Terminal Covers		
	Individual Terminal Cover for 200A Switch-Disconnectors & Fuse Combination (M8 Stud)	STS1
	Individual Terminal Cover for 250A- 400A Switch-Disconnectors & Fuse Combination (M10 Stud)	STS2
	Individual Terminal Cover for 630A Fuse Combination (M12 Stud)	STS3
	Set of 4 Terminal Covers for 630A Switch-Disconnectors (M12 Stud)	STS4















Technical Data Sheet

EDG Sheet Steel Hinged Door Switchgear

CDPD101
Issue 10

Technical Specification

Data supplied against tests to IEC/BS EN 60947-3. * All AC21, AC22 & AC23 tests carried out at 415V

Switch-Disconnectors (O-I)																			
Application	Sym	Unit	Category	32	63		80	100	125	160	200	250	400	630	800	1000	1250		
				3P	3P	6P	3P	3P	3P	3P	3P	3P	3P	3P	3P	3P	3P	3P	3P
Rated thermal current	I_{the}	A		32	63	63	80	100	125	160	200	250	400	630	720	1000	1250		
Rated insulation voltage	U_i	V		690	690	690	690	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000		
Rated impulse voltage	U_{imp}	kV		6	6	6	6	8	8	8	8	12	12	12	12	8	8		
Rated operational current (AC)	I_e	A	400V- AC21A	32	63	63	80	100	125	160	200	250*	400*	630*	800*	1000*	1250*		
			690V- AC21A	32	63	63	80	100	125	160	200	250	400	630	800	1000	1250		
			400V- AC22A	-	-	-	-	100	125	160	200	250*	400*	630*	800*	1000*	1250*		
			690V- AC22A	-	-	-	-	100	125	160	160	250	400	630	800	-	-		
			400V- AC23A	29	48	48	56	105	111	132	132	250*	400*	630*	720*	1000*	1000*		
			690V- AC23A	17	33	33	33	-	-	-	-	250	350	350	350	-	-		
Rated operational current (DC) (/poles in series)	I_e	A	Up to 48V- DC21A	32/1	63/1	63/1	80/1	-	-	-	-	250/2	400/2	630/1	800/1	1000/1	1250/1		
			220V- DC21A	32/3	63/4	1/1	80/4	-	-	-	-	250/2	400/2	630/2	800/2	1000/3	1250/3		
			Up to 48V- DC22A	-	-	-	-	-	-	-	-	250/2	400/1	630/1	800/1	-	-		
			220V- DC22A	-	-	-	-	-	-	-	-	250/2	400/2	630/2	800/2	-	-		
			Up to 48V- DC23A	-	-	-	-	-	-	-	-	250/2	400/1	630/1	800/1	-	-		
			220V- DC23A	-	-	-	-	-	-	-	-	250/2	400/2	630/2	630/2	-	-		
Rated operational power	P_e	kW	400/415V- AC23A	15	25	25	30	59	63	75	75	132	200	315	355	400	500		
			690V- AC23A	15	30	30	30	51	55	55	55	200	315	355	355	-	-		
Short circuit making capacity	I_{cm}	kA	Peak value	1.4	2.9	2.9	3.0	3.7	4.0	5.0	5.0	35	65	80	80	105	105		
Short circuit withstand (1sec)	I_{cw}	kA	rms value	0.6	1.3	1.3	1.4	2.6	2.8	3.0	3.0	8	17	17	17	50	50		
Min. mechanical endurance	-	-	Operations (10 ³)	250	250	500	250	50	50	50	50	16	10	10	10	6	6		
Min. electrical endurance	-	-	415V- at 0.65 pf	-	-	-	-	-	-	-	-	1,000	1,000	500	500	500	500		
Connecting capacity		-	Terminal type																
			mm ²	Min/Max	2.5 / 10	2.5 / 25	2.5 / 25	2.5 / 25	-/50	-/70	-/70	-/95	120	2 x 150	2 x 185	2 x 240	2 x 300	3 x 300	
			mm	Stud/Cu palm width	-	-	-	-	-	-	-	-	8 x 25	10 x 30	10 x 30	12 x 40	12 x 40	12 x 60	12 x 60
			Nm	Tightening torque	1.2	1.2	1.2	1.2	5	5	5	10	30	30	50	50	50	50	












Technical Data Sheet









EDG Sheet Steel Hinged Door Switchgear

CDPD101
Issue 10

Technical Specification

Data supplied against tests to IEC/BS EN 60947-3

Fuse Combination Units (O-I)															
Application	Sym	Unit	Category	32	63	100	125	160	200	250	315	400	630	800	
Rated thermal current	I_{the}	A		32	63	100	125	160	200	250	315	400	630	800	
Rated insulation voltage	U_i	V		750	750	750	750	750	1000	1000	1000	1000	1000	1000	
Rated impulse voltage	U_{imp}	kV		12	12	12	12	12	12	12	12	12	12	12	
Rated operational current	AC	I_e	A	415V- AC23A	32	63	100	125	160	200	250	315	400	630	720
	DC			220V- DC23A	-	-	100/4	100/4	100/4	200/3	250/3	315/3	400/3	630/3	800/3
Rated making capacity (AC23A)		A	415V, 0.35 pf	320	630	1,000	1,250	1,600	2,000	2,500	3,150	4,000	6,300	8,000	
Rated breaking capacity (AC23A)		A	415V, 0.35 pf	256	504	800	1,000	1,280	1,600	2,000	2,520	3,200	5,040	5,760	
Rated Conditional (Fused) short circuit	kA	kA	S/C current rms	80	80	80	80	80	80	80	80	80	80	80	
	A	A	back-up fuse gG	32	63	100	125	160	200	250	315	400	630	800	
Min. mechanical endurance		-	Operations	25000	25000	15000	15000	15000	10000	10000	10000	10000	10000	10000	
Min. electrical endurance		-	415V- at 0.65 pf	1,500	1,500	1,000	1,000	1,000	1,000	1,000	1,000	1,000	1,000	1,000	
BS fuse format				A2	A2	A4	A4	B1, B2	B1, B2	B1, B2	B1, B4	B1, B4	C1, C3	C1, C3	
Connecting capacity		-	Terminal type												
		mm ²	Min/Max	16	25	95	95	120	150	185	240	300	400	400	
		mm	Stud/Cu palm width	-	-	8x20	8x20	8x20	10x25	10x25	10x25	10x25	12x50	12x50	
		Nm	Tightening torque	2.5	2.5	10	10	10	30	30	30	30	50	50	

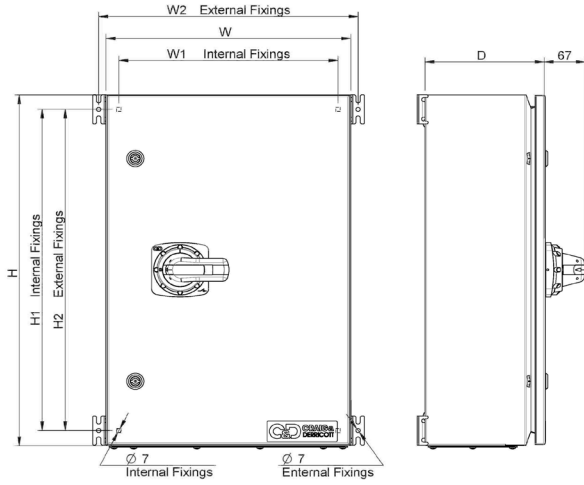
Changeover Switch-Disconnectors (I-O-II)												
Application	Sym	Unit	Category	63	100	125	160	200	250	400	630	
Rated thermal current	I_{the}	A		63	100	125	160	200	250	400	630	
Rated insulation voltage	U_i	V		750	750	1000	1000	1000	1000	1000	1000	
Rated impulse voltage	U_{imp}	kV		6	6	6	6	6	12	12	12	
Rated operational current	I_e	A	415V- AC22A	63	100	125	160	200	250	400	630	
Rated making capacity (AC23A)		A	415V, 0.35 pf	630	630	1,250	1,600	2,000	2,500	4,000	6,300	
Rated breaking capacity (AC23A)		A	415V, 0.35 pf	504	504	1,000	1,280	1,600	2,000	3,200	5,040	
Short circuit current		kA	rms (with fuses)	80	80	80	80	80	100	100	80	
Rated S/C making capacity		kA	Peak	15	15	20	20	20	30	40	50	
Min. mechanical endurance		-	Operations	20,000	20,000	10,000	10,000	10,000	10,000	10,000	10,000	
Min. electrical endurance		-	415V- at 0.65 pf	2,500	1,500	1,000	1,000	1,000	1,000	1,000	500	
Connecting capacity		-	Terminal type									
		mm ²	Max	35	35	95	95	95	240	300	400	
		mm	Stud/Cu palm width	6/12	6/12	8/22	8/22	8/22	10/25	10/25	12/50	
		Nm	Tightening torque	3	3	10	10	10	30	30	50	

Technical Data Sheet

EDG Sheet Steel Hinged Door Switchgear

CDPD101
Issue 10

Dimensions



Encl.	H	W	D	H1	H2	W1	W2
1	300	300	150	248	248	258	324
2	300	300	200	248	248	258	324
3	400	300	150	348	348	258	324
4	400	300	200	348	348	258	324
5	400	400	200	348	348	358	424
6	500	400	200	448	448	358	424
7	600	400	200	548	548	358	424
8	600	400	300	548	548	358	424
9	600	500	200	548	548	458	524
10	700	500	300	648	648	458	524
11	800	600	200	748	748	558	624
12	800	600	300	748	748	558	624
13	1000	600	300	948	948	558	624
14	1000	800	300	948	948	758	824
15	1200	800	300	1148	1148	758	824

Technical Data Sheet

EDS Stainless Steel Hinged Door Switchgear






CDPD151
Issue 3

Stainless Steel Hinged Door Switchgear

A range of 'hinged door' grade 304 stainless steel isolation equipment. Supplied in IP65 generously sized boxes which helps to avoid the need for extension boxes. All enclosures have the switches mounted on a removable galvanised chassis plate. All units are provided with removable bottom only gland plates. The range has a padlockable handle which allows for the insertion of up to three padlocks in the "Off" position. The hinged door cannot be opened in the ON position or when the hand is padlocked in the OFF position. For padlocking in both 'Off' and 'On' positions, add '/10' to the catalogue no. e.g. EDS00323N/10. The door interlock handle can be defeated to enable emergency opening or for testing purposes (100A and above).

Both light grey (RAL 7035) and red (RAL 3020) painted Sheet Steel enclosures are available on request. Contact our sales team on 01543 375 541 for further information. Compliant to IEC / BS EN 60947-3.


'N' = switched neutral | 'NL' = Unswitched neutral (100% rated 32A-200A, 50% rated 250A-1250A) | 'EB' = Early break auxiliary contacts

Switch-Disconnectors (O-I)							
Image	Rating	Format	Cat. No.	Encl. Size	Encl. Material	IP Rating	
	32A	3P+N	EDS00323N	1	Stainless Steel	IP65	
		3P+NL	EDS00323NL				
	63A	3P+N	EDS00633N	1	Stainless Steel	IP65	
		3P+NL	EDS00633NL				
		6P	EDS00636				
	80A	6P+2EB Aux	EDS00636EB	1	Stainless Steel	IP65	
3P+N		EDS00803N					
3P+NL		EDS00803NL					
	100A	6P	EDS00806	1	Stainless Steel	IP65	
		3P+N	EDS01003N	5			
		3P+NL	EDS01003NL				
	125A	6P	EDS01006	3	Stainless Steel	IP65	
		3P+N	EDS01253N				
		3P+NL	EDS01253NL				
160A	6P	EDS01256	5	Stainless Steel	IP65		
	3P+N	EDS01603N					
	3P+NL	EDS01603NL					
	200A	6P	EDS01606	3	Stainless Steel	IP65	
		3P+N	EDS02003N				
		3P+NL	EDS02003NL				
	250A	6P	EDS02006	7	Stainless Steel	IP65	
		3P+N	EDS02503N				
		3P+NL	EDS02503NL				
	400A	6P	EDS02506	9	Stainless Steel	IP65	
		3P+N	EDS04003N				
		3P+NL	EDS04003NL				
	630A	6P	EDS04006	11	Stainless Steel	IP65	
		3P+N	EDS06303N				
		3P+NL	EDS06303NL				
	800A	6P	EDS06306	13	Stainless Steel	IP65	
		3P+N	EDS08003N				
		3P+NL	EDS08003NL				
	1000A	6P	EDS08006	13	Stainless Steel	IP65	
		3P+N	EDS10003N				
		3P+NL	EDS10003NL				
1250A	6P	EDS10006	14	Stainless Steel	IP65		
	3P+N	EDS12503N					
	3P+NL	EDS12503NL	15	Stainless Steel	IP65		
	3P+N	EDS12506					
	Changeover Switch-Disconnectors (I-O-II)						
		63A	4P	ECODS00634	4	Stainless Steel	IP65
		100A	4P	ECODS01004	4	Stainless Steel	IP65
		125A	4P	ECODS01254	8	Stainless Steel	IP65
		160A	4P	ECODS01604	8	Stainless Steel	IP65
		200A	4P	ECODS02004	8	Stainless Steel	IP65
250A		4P	ECODS02504	10	Stainless Steel	IP65	
400A		4P	ECODS04004	13	Stainless Steel	IP65	
630A		4P	ECODS06304	13	Stainless Steel	IP65	

Technical Data Sheet

EDS Stainless Steel Hinged Door Switchgear

CDPD151
Issue 3




Fuse Combination Units (O-I)						
Image	Rating	Format	Cat. No.	Encl. Size	Encl. Material	IP Rating
	32A	3P+NL	EDFS00323NL	2	Stainless Steel	IP65
	63A	3P+NL	EDFS00633NL	2	Stainless Steel	IP65
	100A	3P+NL	EDFS01003NL	6	Stainless Steel	IP65
	125A	3P+NL	EDFS01253NL	6	Stainless Steel	IP65
	160A	3P+NL	EDFS01603NL	6	Stainless Steel	IP65
	200A	3P+NL	EDFS02003NL	8	Stainless Steel	IP65
	250A	3P+NL	EDFS02503NL	8	Stainless Steel	IP65
	315A	3P+NL	EDFS03153NL	12	Stainless Steel	IP65
	400A	3P+NL	EDFS04003NL	12	Stainless Steel	IP65
	630A	3P+NL	EDFS06303NL	13	Stainless Steel	IP65
	800A	3P+NL	EDFS08003NL	13	Stainless Steel	IP65

Hinged Door Accessories

Add-on auxiliary blocks are available for all hinged door products. All auxiliaries are supplied as 1 N/O+1 N/C pair. All N/O auxiliary contacts are early break with respect to the main poles when switching from 'On' to 'Off'.

All of the Fuse Combination Units are supplied fitted with a set of fully rated IEC/BS EN 60269 (BS88) fuse links. Replacements can be supplied as individual fuse links and can be fitted to a lower rating to suit a particular load; please refer to the rating table below to maintain the correct size/tag format.

Terminal protection is provided on all items for live incoming terminals; spare terminal covers are available for replacement or extending the protection to the outgoing terminals. (Not available for 800A- 1250A switch-disconnectors.)

Auxiliary Contacts		
Image	Description	Cat. No.
	Auxiliary Contact for 32A- 200A Switch-Disconnectors (Type A)	SAUXCO
	Auxiliary Contact for 63A- 160A Fuse Combination (Type B)	SAUXKITA
	Auxiliary Contact for 250A Switch-Disconnectors (Type C)	SAUXKITB
	Auxiliary Contact for 400A- 800A Switch-Disconnectors & 200A- 400A Fuse Combination (Type C)	SAUXKITC
	Auxiliary Contact for 1000A Switch-Disconnectors & 630A Fuse Combination Units (Type D)	SAUXKITD
Fuse Links		
	32A Fuse Link. BS Fuse format A2, A3. Fuse Fixing CRS (mm) 73 nom.	SFL32
	63A Fuse Link. BS Fuse format A2, A3. Fuse Fixing CRS (mm) 73 nom.	SFL63
	100A Fuse Link. BS Fuse format A4. Fuse Fixing CRS (mm) 94 nom.	SFL100
	125A Fuse Link. BS Fuse format A4. Fuse Fixing CRS (mm) 94 nom.	SFL125
	160A Fuse Link. BS Fuse format B1, B2. Fuse Fixing CRS (mm) 111 nom.	SFL160
	200A Fuse Link. BS Fuse format B1-B2. Fuse Fixing CRS (mm) 111 nom.	SFL200
	250A Fuse Link. BS Fuse format B1-B2. Fuse Fixing CRS (mm) 111 nom.	SFL250
	315A Fuse Link. BS Fuse format B1-B4. Fuse Fixing CRS (mm) 111 nom.	SFL315
	400A Fuse Link. BS Fuse format B1-B4. Fuse Fixing CRS (mm) 111 nom.	SFL400
	630A Fuse Link. BS Fuse format C1-C3. Fuse Fixing CRS (mm) 133/184 nom.	SFL630
Terminal Covers		
	Individual Terminal Cover for 200A Switch-Disconnectors & Fuse Combination (M8 Stud)	STS1
	Individual Terminal Cover for 250A- 400A Switch-Disconnectors & Fuse Combination (M10 Stud)	STS2
	Individual Terminal Cover for 630A Fuse Combination (M12 Stud)	STS3
	Set of 4 Terminal Covers for 630A Switch-Disconnectors (M12 Stud)	STS4















Technical Data Sheet

EDS Stainless Steel Hinged Door Switchgear

CDPD151
Issue 3

Technical Specification

Data supplied against tests to IEC/BS EN 60947-3. * All AC21, AC22 & AC23 tests carried out at 415V

Switch-Disconnectors (O-I)																		
Application	Sym	Unit	Category	32	63		80	100	125	160	200	250	400	630	800	1000	1250	
				3P	3P	6P	3P	3P	3P	3P	3P	3P	3P	3P	3P	3P	3P	3P
Rated thermal current	I_{the}	A		32	63	63	80	100	125	160	200	250	400	630	720	1000	1250	
Rated insulation voltage	U_i	V		690	690	690	690	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	
Rated impulse voltage	U_{imp}	kV		6	6	6	6	8	8	8	8	12	12	12	12	8	8	
Rated operational current (AC)	I_e	A	400V- AC21A	32	63	63	80	100	125	160	200	250*	400*	630*	800*	1000*	1250*	
			690V- AC21A	32	63	63	80	100	125	160	200	250	400	630	800	1000	1250	
			400V- AC22A	-	-	-	-	100	125	160	200	250*	400*	630*	800*	1000*	1250*	
			690V- AC22A	-	-	-	-	100	125	160	160	250	400	630	800	-	-	
			400V- AC23A	29	48	48	56	105	111	132	132	250*	400*	630*	720*	1000*	1000*	
			690V- AC23A	17	33	33	33	-	-	-	-	250	350	350	350	-	-	
Rated operational current (DC) (/poles in series)	I_e	A	Up to 48V- DC21A	32/1	63/1	63/1	80/1	-	-	-	-	250/2	400/2	630/1	800/1	1000/1	1250/1	
			220V- DC21A	32/3	63/4	1/1	80/4	-	-	-	-	250/2	400/2	630/2	800/2	1000/3	1250/3	
			Up to 48V- DC22A	-	-	-	-	-	-	-	-	250/2	400/1	630/1	800/1	-	-	
			220V- DC22A	-	-	-	-	-	-	-	-	250/2	400/2	630/2	800/2	-	-	
			Up to 48V- DC23A	-	-	-	-	-	-	-	-	250/2	400/1	630/1	800/1	-	-	
			220V- DC23A	-	-	-	-	-	-	-	-	250/2	400/2	630/2	630/2	-	-	
Rated operational power	P_e	kW	400/415V- AC23A	15	25	25	30	59	63	75	75	132	200	315	355	400	500	
			690V- AC23A	15	30	30	30	51	55	55	55	200	315	355	355	-	-	
Short circuit making capacity	I_{cm}	kA	Peak value	1.4	2.9	2.9	3.0	3.7	4.0	5.0	5.0	35	65	80	80	105	105	
Short circuit withstand (1sec)	I_{cw}	kA	rms value	0.6	1.3	1.3	1.4	2.6	2.8	3.0	3.0	8	17	17	17	50	50	
Min. mechanical endurance	-	-	Operations (10 ³)	250	250	500	250	50	50	50	50	16	10	10	10	6	6	
Min. electrical endurance	-	-	415V- at 0.65 pf	-	-	-	-	-	-	-	-	1,000	1,000	500	500	500	500	
Connecting capacity		-	Terminal type															
		mm ²	Min/Max	2.5 / 10	2.5 / 25	2.5 / 25	2.5 / 25	-/50	-/70	-/70	-/95	120	2 x 150	2 x 185	2 x 240	2 x 300	3 x 300	
		mm	Stud/Cu palm width	-	-	-	-	-	-	-	-	8 x 25	10 x 30	10 x 30	12 x 40	12 x 40	12 x 60	12 x 60
		Nm	Tightening torque	1.2	1.2	1.2	1.2	5	5	5	10	30	30	50	50	50	50	












Technical Data Sheet









EDS Stainless Steel Hinged Door Switchgear

CDPD151
Issue 3

Technical Specification

Data supplied against tests to IEC/BS EN 60947-3

Fuse Combination Units (O-I)														
Application	Sym	Unit	Category	32	63	100	125	160	200	250	315	400	630	800
Rated thermal current	I_{the}	A		32	63	100	125	160	200	250	315	400	630	800
Rated insulation voltage	U_i	V		750	750	750	750	750	1000	1000	1000	1000	1000	1000
Rated impulse voltage	U_{imp}	kV		12	12	12	12	12	12	12	12	12	12	12
Rated operational current	AC	A	415V- AC23A	32	63	100	125	160	200	250	315	400	630	720
	DC		220V- DC23A	-	-	100/4	100/4	100/4	200/3	250/3	315/3	400/3	630/3	800/3
Rated making capacity (AC23A)		A	415V, 0.35 pf	320	630	1,000	1,250	1,600	2,000	2,500	3,150	4,000	6,300	8,000
Rated breaking capacity (AC23A)		A	415V, 0.35 pf	256	504	800	1,000	1,280	1,600	2,000	2,520	3,200	5,040	5,760
Rated Conditional (Fused) short circuit	kA	kA	S/C current rms	80	80	80	80	80	80	80	80	80	80	80
	A	A	back-up fuse gG	32	63	100	125	160	200	250	315	400	630	800
Min. mechanical endurance		-	Operations	25000	25000	15000	15000	15000	10000	10000	10000	10000	10000	10000
Min. electrical endurance		-	415V- at 0.65 pf	1,500	1,500	1,000	1,000	1,000	1,000	1,000	1,000	1,000	1,000	1,000
BS fuse format				A2	A2	A4	A4	B1, B2	B1, B2	B1, B2	B1, B4	B1, B4	C1, C3	C1, C3
Connecting capacity		-	Terminal type											
		mm ²	Min/Max	16	25	95	95	120	150	185	240	300	400	400
		mm	Stud/Cu palm width	-	-	8x20	8x20	8x20	10x25	10x25	10x25	10x25	12x50	12x50
		Nm	Tightening torque	2.5	2.5	10	10	10	30	30	30	30	50	50

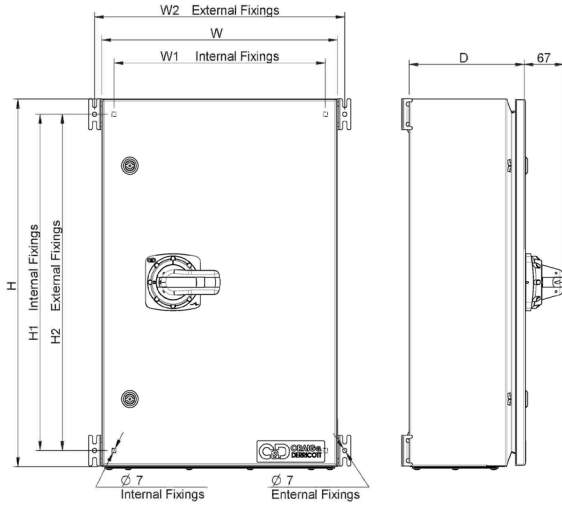
Changeover Switch-Disconnectors (I-O-II)												
Application	Sym	Unit	Category	63	100	125	160	200	250	400	630	
Rated thermal current	I_{the}	A		63	100	125	160	200	250	400	630	
Rated insulation voltage	U_i	V		750	750	1000	1000	1000	1000	1000	1000	
Rated impulse voltage	U_{imp}	kV		6	6	6	6	6	12	12	12	
Rated operational current	I_e	A	415V- AC22A	63	100	125	160	200	250	400	630	
Rated making capacity (AC23A)		A	415V, 0.35 pf	630	630	1,250	1,600	2,000	2,500	4,000	6,300	
Rated breaking capacity (AC23A)		A	415V, 0.35 pf	504	504	1,000	1,280	1,600	2,000	3,200	5,040	
Short circuit current		kA	rms (with fuses)	80	80	80	80	80	100	100	80	
Rated S/C making capacity		kA	Peak	15	15	20	20	20	30	40	50	
Min. mechanical endurance		-	Operations	20,000	20,000	10,000	10,000	10,000	10,000	10,000	10,000	
Min. electrical endurance		-	415V- at 0.65 pf	2,500	1,500	1,000	1,000	1,000	1,000	1,000	500	
Connecting capacity		-	Terminal type									
		mm ²	Max	35	35	95	95	95	240	300	400	
		mm	Stud/Cu palm width	6/12	6/12	8/22	8/22	8/22	10/25	10/25	12/50	
		Nm	Tightening torque	3	3	10	10	10	30	30	50	

Technical Data Sheet

EDS Stainless Steel Hinged Door Switchgear

CDPD151
Issue 3

Dimensions



Encl.	H	W	D	H1	H2	W1	W2
1	300	300	150	248	248	258	324
2	300	300	200	248	248	258	324
3	400	300	150	348	348	258	324
4	400	300	200	348	348	258	324
5	400	400	200	348	348	358	424
6	500	400	200	448	448	358	424
7	600	400	200	548	548	358	424
8	600	400	300	548	548	358	424
9	600	600	200	548	548	558	624
10	700	500	300	648	648	458	524
11	800	600	200	748	748	558	624
12	800	600	300	748	748	558	624
13	1000	600	300	948	948	558	624
14	1000	800	300	948	948	758	824
15	1200	800	300	1148	1148	758	824